



X. SB: ODI.0240



X. SB: ODI.0250



X. SB: ODI.0310



X. SB: ODI.0270



X. SB: ODI.0200



X. SB: ODI.0110



X. SB: ODI.0260



X. SB: ODI.0610



X. SB: ODI.0860



X. SB: ODI.0690



X. SB: ODI.0840



X. SB: ODI.0820




X. SB: ODI.0780



X. SB: ODI.0810



X. SB: ODI.0710




X. SB: ODI.0800



Odina

X
A touch of luxury.

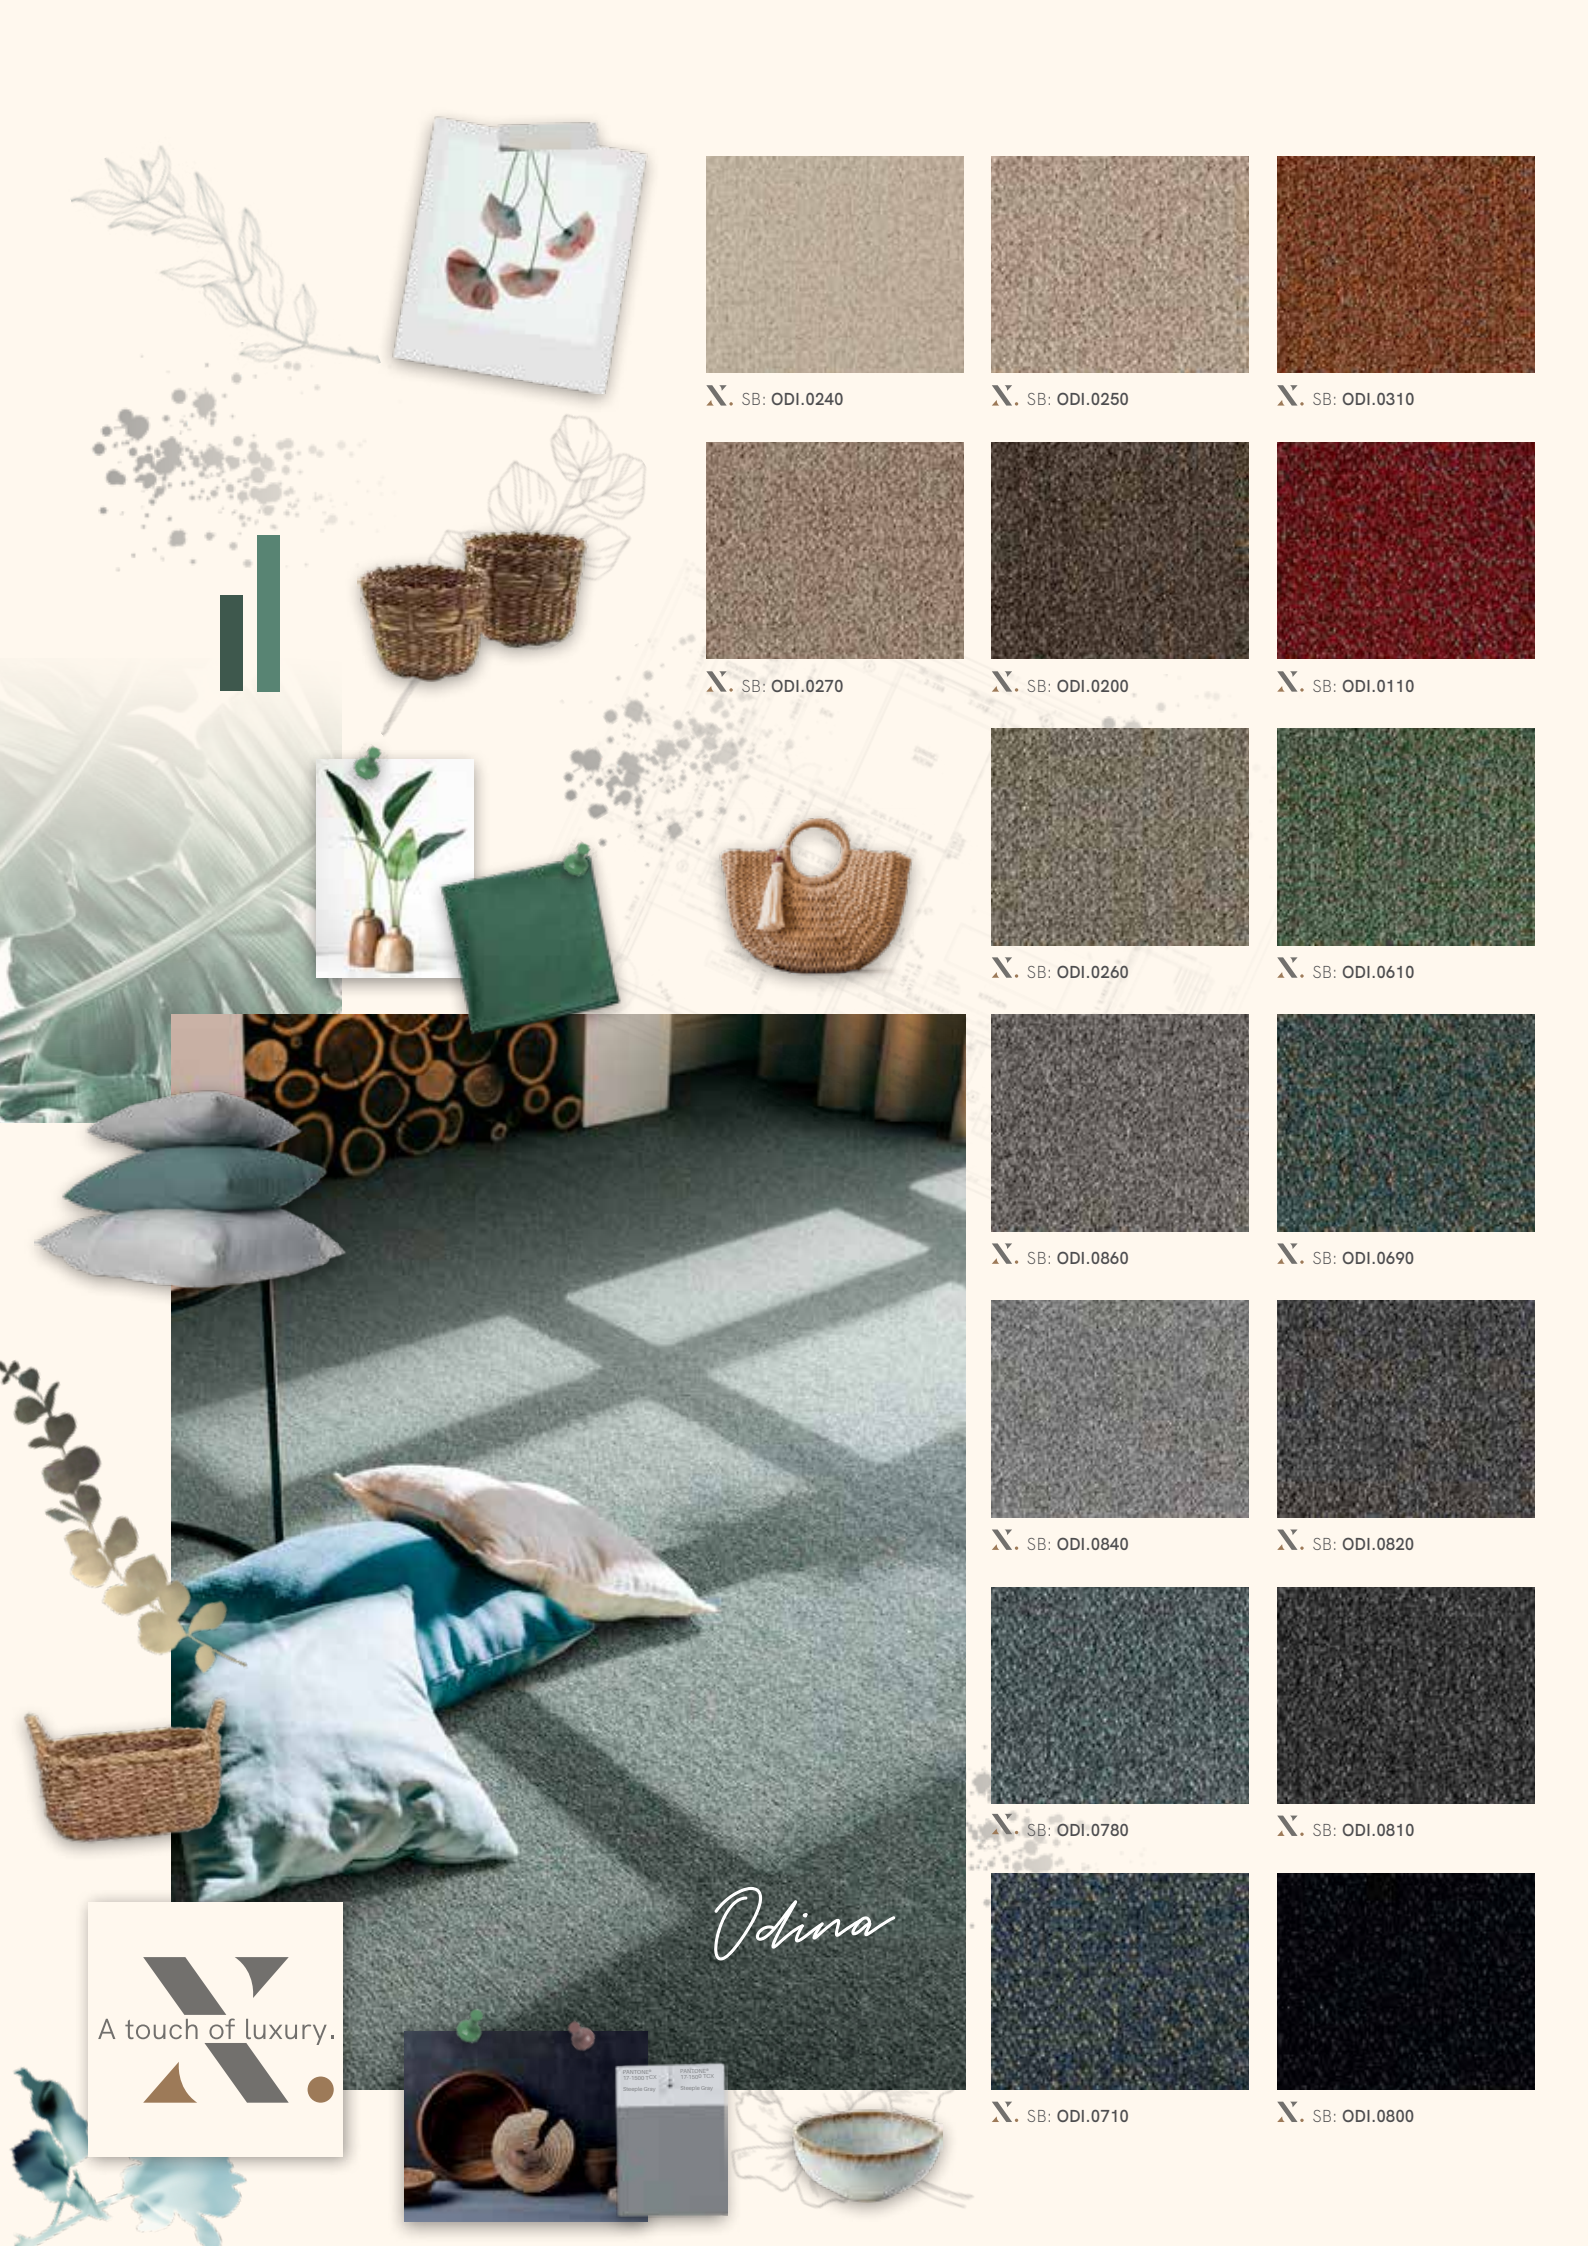

X.

A touch of luxury.

Odina



Secondary Backing Rugtype • Envers Rücken • Sottofondo • Reverso	SB
Manufacturing process Fabricagemetode • Technique de fabrication Herstellungstyp • Tecnica di fabbricazione • Técnica de fabricación	1/10" SAXONY
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	PA
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	woven
Width Breedte • Largeur Breite • Altezza • Ancho	± 400 & 500 cm
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	± 5,5 mm
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	± 7,5 mm
Number of knots/sqm Aantal noppen/m ² • Nombre de points/m ² Noppenzahl/m ² • Numero di punti/mq • Puntos de pelo/m ²	± 260.040
Pile weight/sqm Poolinzetgewicht/m ² • Poids mis en oeuvre/m ² Poleinsatzgewicht/m ² • Peso felpa/mq • Peso de pelo/m ²	± 1.210 gr
Total weight/sqm Totaal gewicht/m ² • Poids total/m ² Gesamtwicht/m ² • Peso totale/m ² • Peso total/m ²	± 2.480 gr

EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	C_f-s1
--	-------------------------

EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	Class 32 Commercial General
--	--

ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico	± 25 dB
--	----------------

DIN 52612 Thermal retention Warmtedoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica • Resistencia térmica	± 0,075 m²/kW
---	---------------------------------

TOG Rating	± 0,75
-------------------	---------------

ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	≥ 5
--	------------

ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	≥ 3-4
---	--------------

ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori allo sfregamento a secco Solidez color al agua pérdida de color	≥ 2-3
---	--------------

ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungstechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	≥ 3-4
--	--------------

ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungstechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	≥ 3
--	------------

(a) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com

REACH
The new EU chemicals legislation

CE
EN 14041
DOP-1038-128654
NB 2401

100% PA

ISO 9001:2015

A+

Green signature
of Lano Carpets

GUT
GREEN BUILDING TECHNOLOGY

CB79E570
www.gut-prodis.eu

LANO NV - Venetiëlaan 33
B-8530 HARELBEKE
Floor carpets to use in buildings

Lano
Carpet Solutions

Venetiëlaan 33 • 8530 Harelbeke-Belgium
t +32-56-65 40 00
marketing@lano.be • www.lano.com